




| | | | |
|---------|------------|-----------|------|
| Version | Change NO. | Autograph | Date |
| | | | |

1.0-1.85mm ADAPTERS F/M 65GHZ

A-10F18M

SPECIFICATIONS

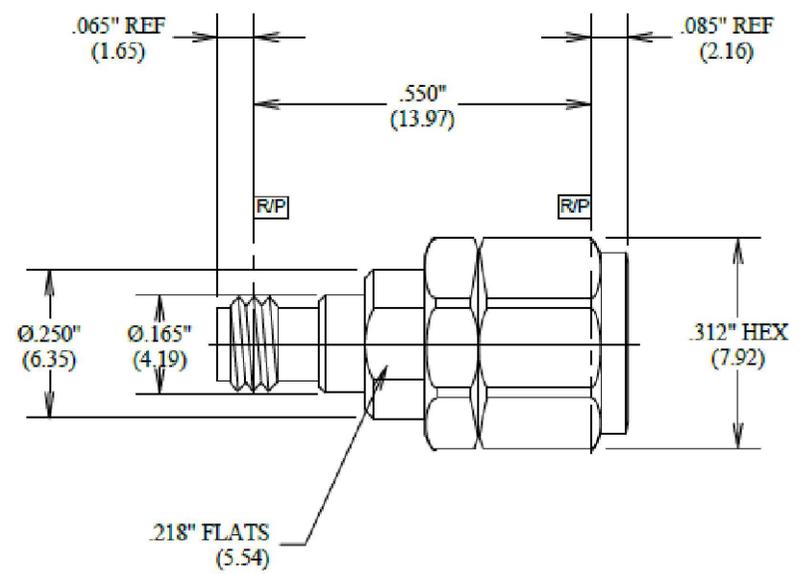

ELECTRICAL

VSWR: 1.25:1
 Frequency: DC-65 GHz
 Impedance: 50 Ohms

MECHANICAL

1000 Cycles Min

ENVIRONMENTAL

-55° C -- +125° C
 Corrosion: MIL-STD 202
 Vibration: MIL-STD 202

MATERIALS

Body: SU304 Polished & Passivated
 Center Contact : Beryllium Copper Gold Plated
 Insulators: PEI

Jointly sign
 Quality department
 Production department
 Purchasing Department

| | | | |
|---------------------------|----------------|----------------|---|
| Material: | Important size | Key dimensions | Shanghai Juncoax RF Technoloies Co.,Ltd |
| Drafting: Yuan.YJ | * | ▲ | Material number:ZJQ-0008 |
| Check: Ming.WM | Marker phase | Version | Proportion |
| Standard: Liang.DH | P | A/0 | 2:1 |
| Approval: Colin.tsai | Unit | mm | Model:A-10F18M |
| ALL (1) page No. (1) page | | | |