



Version	Change NO.	Autograph	Date

2.92mm-SSMA ADAPTERS F/F 40GHZ

A-29FSSF

SPECIFICATIONS

ELECTRICAL

VSWR: 1.20:1
 Frequency: DC-40 GHz
 Impedance: 50 Ohms

MECHANICAL


1000 Cycles Min

ENVIRONMENTAL

-55° C — +125° C
 Corrosion: MIL-STD 202
 Vibration: MIL-STD 202

MATERIALS

Body: SU304 Polished & Passivated
 Center Contact : Beryllium Copper Gold Plated
 Insulators: PTFE&PEI

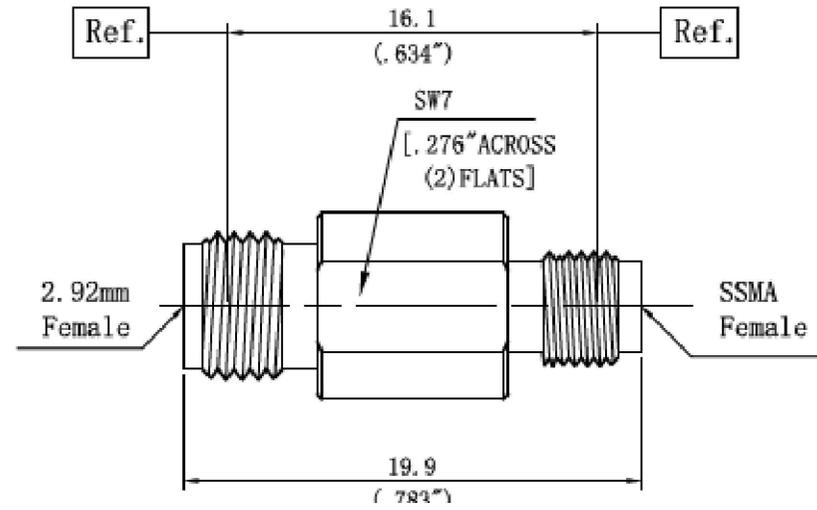

Jointly sign
 Quality department
 Production department
 Purchasing Department

Material:	Important size	Key dimensions	Shanghai Juncoax RF Technologies Co., Ltd
Drafting: Yuan.YJ	*	▲	Material number: ZJQ-0079
Check: Ming.WM	Marker phase	Version	Proportion
Standard: Liang.DH	P	A/O	Property
Approval: Colin.tsai		2:1	Unit
			mm
	ALL (1) page No. (1) page		