

Version	Change NO.	Autograph	Date



# G3PO-SMA ADAPTERS F/F 26GHZ

## A-G3FSF

### SPECIFICATIONS

#### ELECTRICAL

VSWR: DC-18GHz:1.20:1  
           DC-26GHz:1.30:1  
 Frequency: DC-26 GHz  
 Impedance: 50 Ohms

#### MECHANICAL


1000 Cycles Min

#### ENVIRONMENTAL

-55° C -- +125° C  
 Corrosion: MIL-STD 202  
 Vibration: MIL-STD 202

#### MATERIALS

Body: SU304 Polished & Passivated  
 Center Contact : Beryllium Copper Gold Plated  
 Insulators: PTFE&PEI

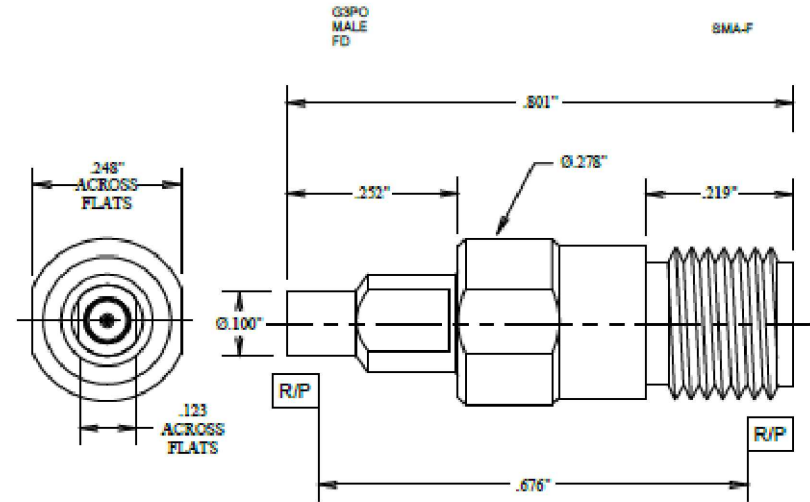

Jointly sign

Quality department

Production department

Purchasing Department

Material:	Important size	Key dimensions	Shanghai Juncoax RF Technologies Co., Ltd
Drafting: Yuan.YJ	*	▲	Material number:ZJQ-0114
Check: Ming.WM	Marker phase	Version	Proportion
Standard: Liang.DH	P	A/O	2:1
Approval: Colin.tsai	Unit	mm	Model:A-G3FSF
ALL (1) page No. (1) page			