

|         |            |           |      |
|---------|------------|-----------|------|
| Version | Change NO. | Autograph | Date |
|         |            |           |      |

# SMA-SSMA ADAPTERS F/F 27GHZ

## A-SFSSF

### SPECIFICATIONS

#### ELECTRICAL

VSWR: 1.15:1

Frequency: DC-27 GHz

Impedance: 50 Ohms

#### MECHANICAL

1000 Cycles Min

#### ENVIRONMENTAL

-55° C -- +125° C

Corrosion: MIL-STD 202


Vibration: MIL-STD 202

#### MATERIALS

Body: SU304 Polished & Passivated

Center Contact : Beryllium Copper Gold Plated

Insulators: PTFE&PEI

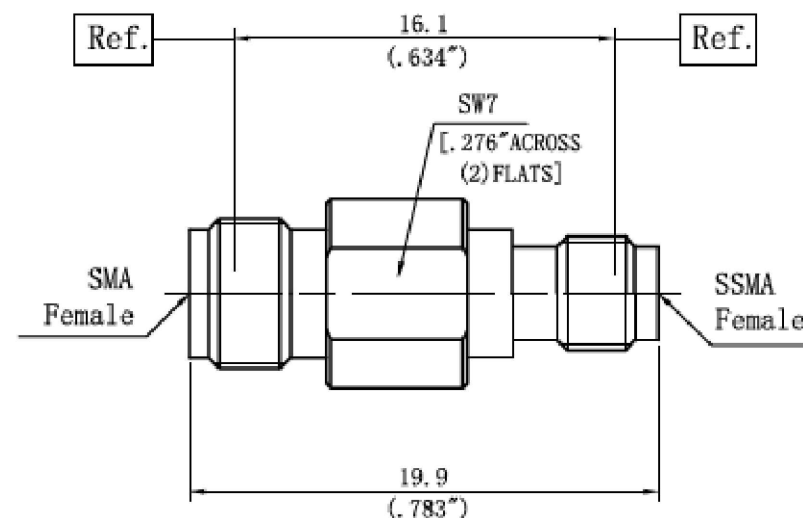

Jointly sign

Quality department

Production department

Purchasing Department

|                      |                |                |   |
|----------------------|----------------|----------------|---|
| Material:            | Important size | Key dimensions | Shanghai Juncoax RF Technologies Co., Ltd |
| Drafting: Yuan.YJ    | *              | ▲              | Material number: ZJQ-0211                 |
| Check: Ming.WM       | Marker phase   | Version        | Proportion                                |
| Standard: Liang.DH   | P              | A/0            | Property                                  |
| Approval: Colin.tsai |                |                | Unit                                      |
|                      |                |                | mm  |
|                      |                | ALL (1) page   | No. (1) page                              |

