

|         |            |           |      |
|---------|------------|-----------|------|
| Version | Change NO. | Autograph | Date |
|         |            |           |      |



# SMA-QMA ADAPTERS P/P 6GHZ

## A-SPQP

### SPECIFICATIONS

#### ELECTRICAL

VSWR: 1.15:1  
 Frequency: DC-6 GHz  
 Impedance: 50 Ohms

#### MECHANICAL


1000 Cycles Min

#### ENVIRONMENTAL

-55° C -- +125° C  
 Corrosion: MIL-STD 202  
 Vibration: MIL-STD 202

#### MATERIALS

Body: SU304 Polished & Passivated  
 Center Contact : Beryllium Copper Gold Plated  
 Insulators: PTFE&PEI

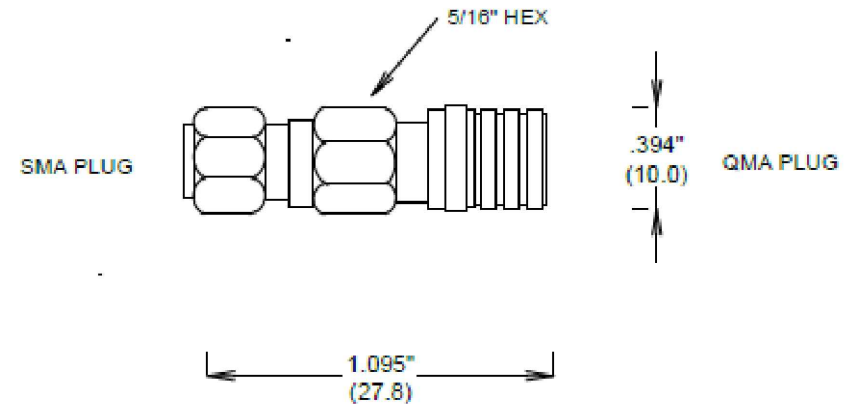

Jointly sign  
 Quality department  
 Production department  
 Purchasing Department

|                      |                           |                |   |
|----------------------|---------------------------|----------------|---|
| Material:            | Important size            | Key dimensions | Shanghai Juncoax RF Technologies Co., Ltd |
| Drafting: Yuan.YJ    | *                         | ▲              | Material number:ZJQ-0194                  |
| Check: Ming.WM       | Marker phase              | Version        | Proportion                                |
| Standard: Liang.DH   | P                         | A/0            | 2:1                                       |
| Approval: Colin.tsai | ALL (1) page No. (1) page |                | mm  |
|                      |                           |                |   |