

Version	Change NO.	Autograph	Date

1.85mm-2.4mm ADAPTERS F/M 50GHZ

A-18F24M

SPECIFICATIONS

ELECTRICAL

VSWR: 1.25:1

Frequency: DC-50 GHz

Impedance: 50 Ohms

MECHANICAL

1000 Cycles Min

ENVIRONMENTAL

-55° C -- +125° C

Corrosion: MIL-STD 202


Vibration: MIL-STD 202


MATERIALS

Body: SU304 Polished & Passivated

Center Contact : Beryllium Copper Gold Plated

Insulators: PEI

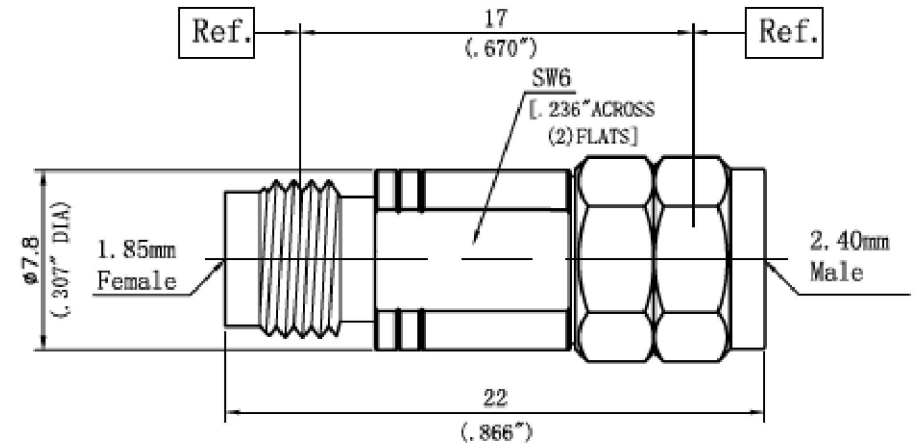

Material:	Important size			Key dimensions			Shanghai Juncoax RF Technoloies Co.,Ltd	
Drafting: Yuan.YJ	*			▲			Material number:ZJQ-0024	
Check: Ming.WM	Marker phase		Version	Proportion	Property	Unit	Model:A-18F24M	
Standard: Liang.DH			P	A/0	2:1		mm	
Approval: Colin.tsai	ALL (1) page No. (1) page							

Jointly sign

Quality department

Production department

Purchasing Department