

Version	Change NO.	Autograph	Date

1.85mm-2.92mm ADAPTERS F/M 40GHZ

A-18F29M

SPECIFICATIONS

ELECTRICAL

VSWR: 1.15:1
Frequency: DC-40 GHz
Impedance: 50 Ohms

MECHANICAL


1000 Cycles Min


ENVIRONMENTAL

-55° C -- +125° C
Corrosion: MIL-STD 202
Vibration: MIL-STD 202

MATERIALS

Body: SU304 Polished & Passivated
Center Contact : Beryllium Copper Gold Plated
Insulators: PEI

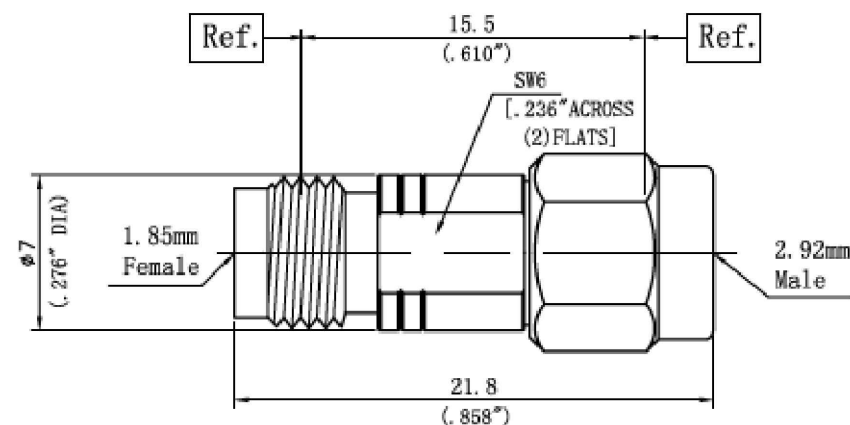

Material:	Important size			Key dimensions			Shanghai Juncoax RF Technoloies Co.,Ltd	
Drafting: Yuan.YJ	*			▲			Material number:ZJQ-0017	
Check: Ming.WM	Marker phase		Version	Proportion	Property	Unit	Model:A-18F29M	
Standard: Liang.DH			P	A/0	2:1		mm	
Approval: Colin.tsai	ALL (1) page No. (1) page							

Jointly sign

Quality department

Production department

Purchasing Department