

Version	Change NO.	Autograph	Date



1.85mm-3.5mm ADAPTERS M/M 33GHZ

A-18M35M

SPECIFICATIONS

ELECTRICAL

VSWR: 1.15:1

Frequency: DC-33 GHz

Impedance: 50 Ohms

MECHANICAL

1000 Cycles Min

ENVIRONMENTAL

-55°C — $+125^{\circ}\text{C}$

Corrosion: MIL-STD 202


Vibration: MIL-STD 202


MATERIALS

Body: SU304 Polished & Passivated

Center Contact : Beryllium Copper Gold Plated

Insulators: PEI

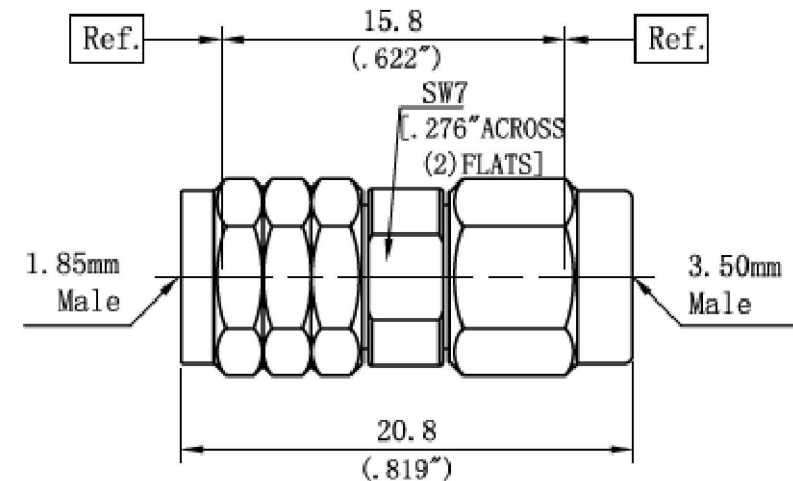

Material:	Important size			Key dimensions			Shanghai Juncoax RF Technoloies Co.,Ltd	
Drafting: Yuan.YJ	*			▲			Material number:ZJQ-0023	
Check: Ming.WM	Marker phase		Version	Proportion	Property	Unit	Model:A-18M35M	
Standard: Liang.DH			P	A/0	2:1		mm	
Approval: Colin.tsai	ALL (1) page No. (1) page							