

Version	Change NO.	Autograph	Date

1.85mm-2.92mm ADAPTERS M/M 40GHZ

A-18M29M

SPECIFICATIONS

ELECTRICAL

VSWR: 1.15:1
Frequency: DC-40 GHz
Impedance: 50 Ohms

MECHANICAL


1000 Cycles Min

ENVIRONMENTAL

-55° C -- +125° C
Corrosion: MIL-STD 202
Vibration: MIL-STD 202

MATERIALS

Body: SU304 Polished & Passivated
Center Contact : Beryllium Copper Gold Plated
Insulators: PEI

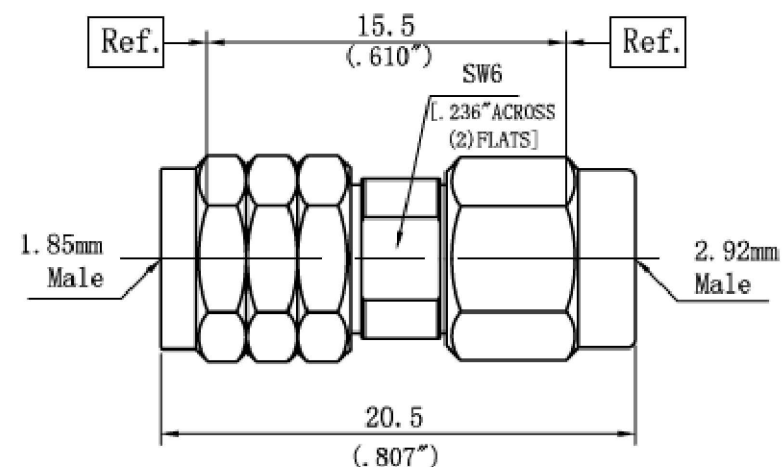

Material:	Important size	Key dimensions	Shanghai Juncoax RF Technoloies Co.,Ltd
Drafting: Yuan.YJ	*	▲	Material number:ZJQ-0019
Check: Ming.WM	Marker phase	Version	Proportion
Standard: Liang.DH	P	A/0	2:1
Approval: Colin.tsai	ALL (1) page	No. (1) page	Model:A-18M29M

